




 **BASALTO** Antracita

Basalto

GLAZED TILES

**4 COLOURS
1 SIZE**



CAYENNE
CERAMICHE

COLOURS

WHITE

SILVER

ANTRACITA

GREY

SIZES

· 60x60

FINISHES

· MATT
· LAPPATO
· ANTISLIP

FACES

· 9 FOR 60x60


BODY

· NORMAL BODY

ACCESORIES

· SKIRTING
· STEP
· MOSAICS




 **BASALTO** Silver

PACKING LIST

Size (cm)	Thickness (mm)	PC/CTN	SQM/CTN	KG/CTN	1.1 X 1.1M Pallet		1.2 X 0,8M Pallet	
					CTNS/PALLET	SQM/PALLET	CTNS/PALLET	SQM/PALLET
60x60	10	4	1,44	32	40	57,6	32	46,08

WHITE

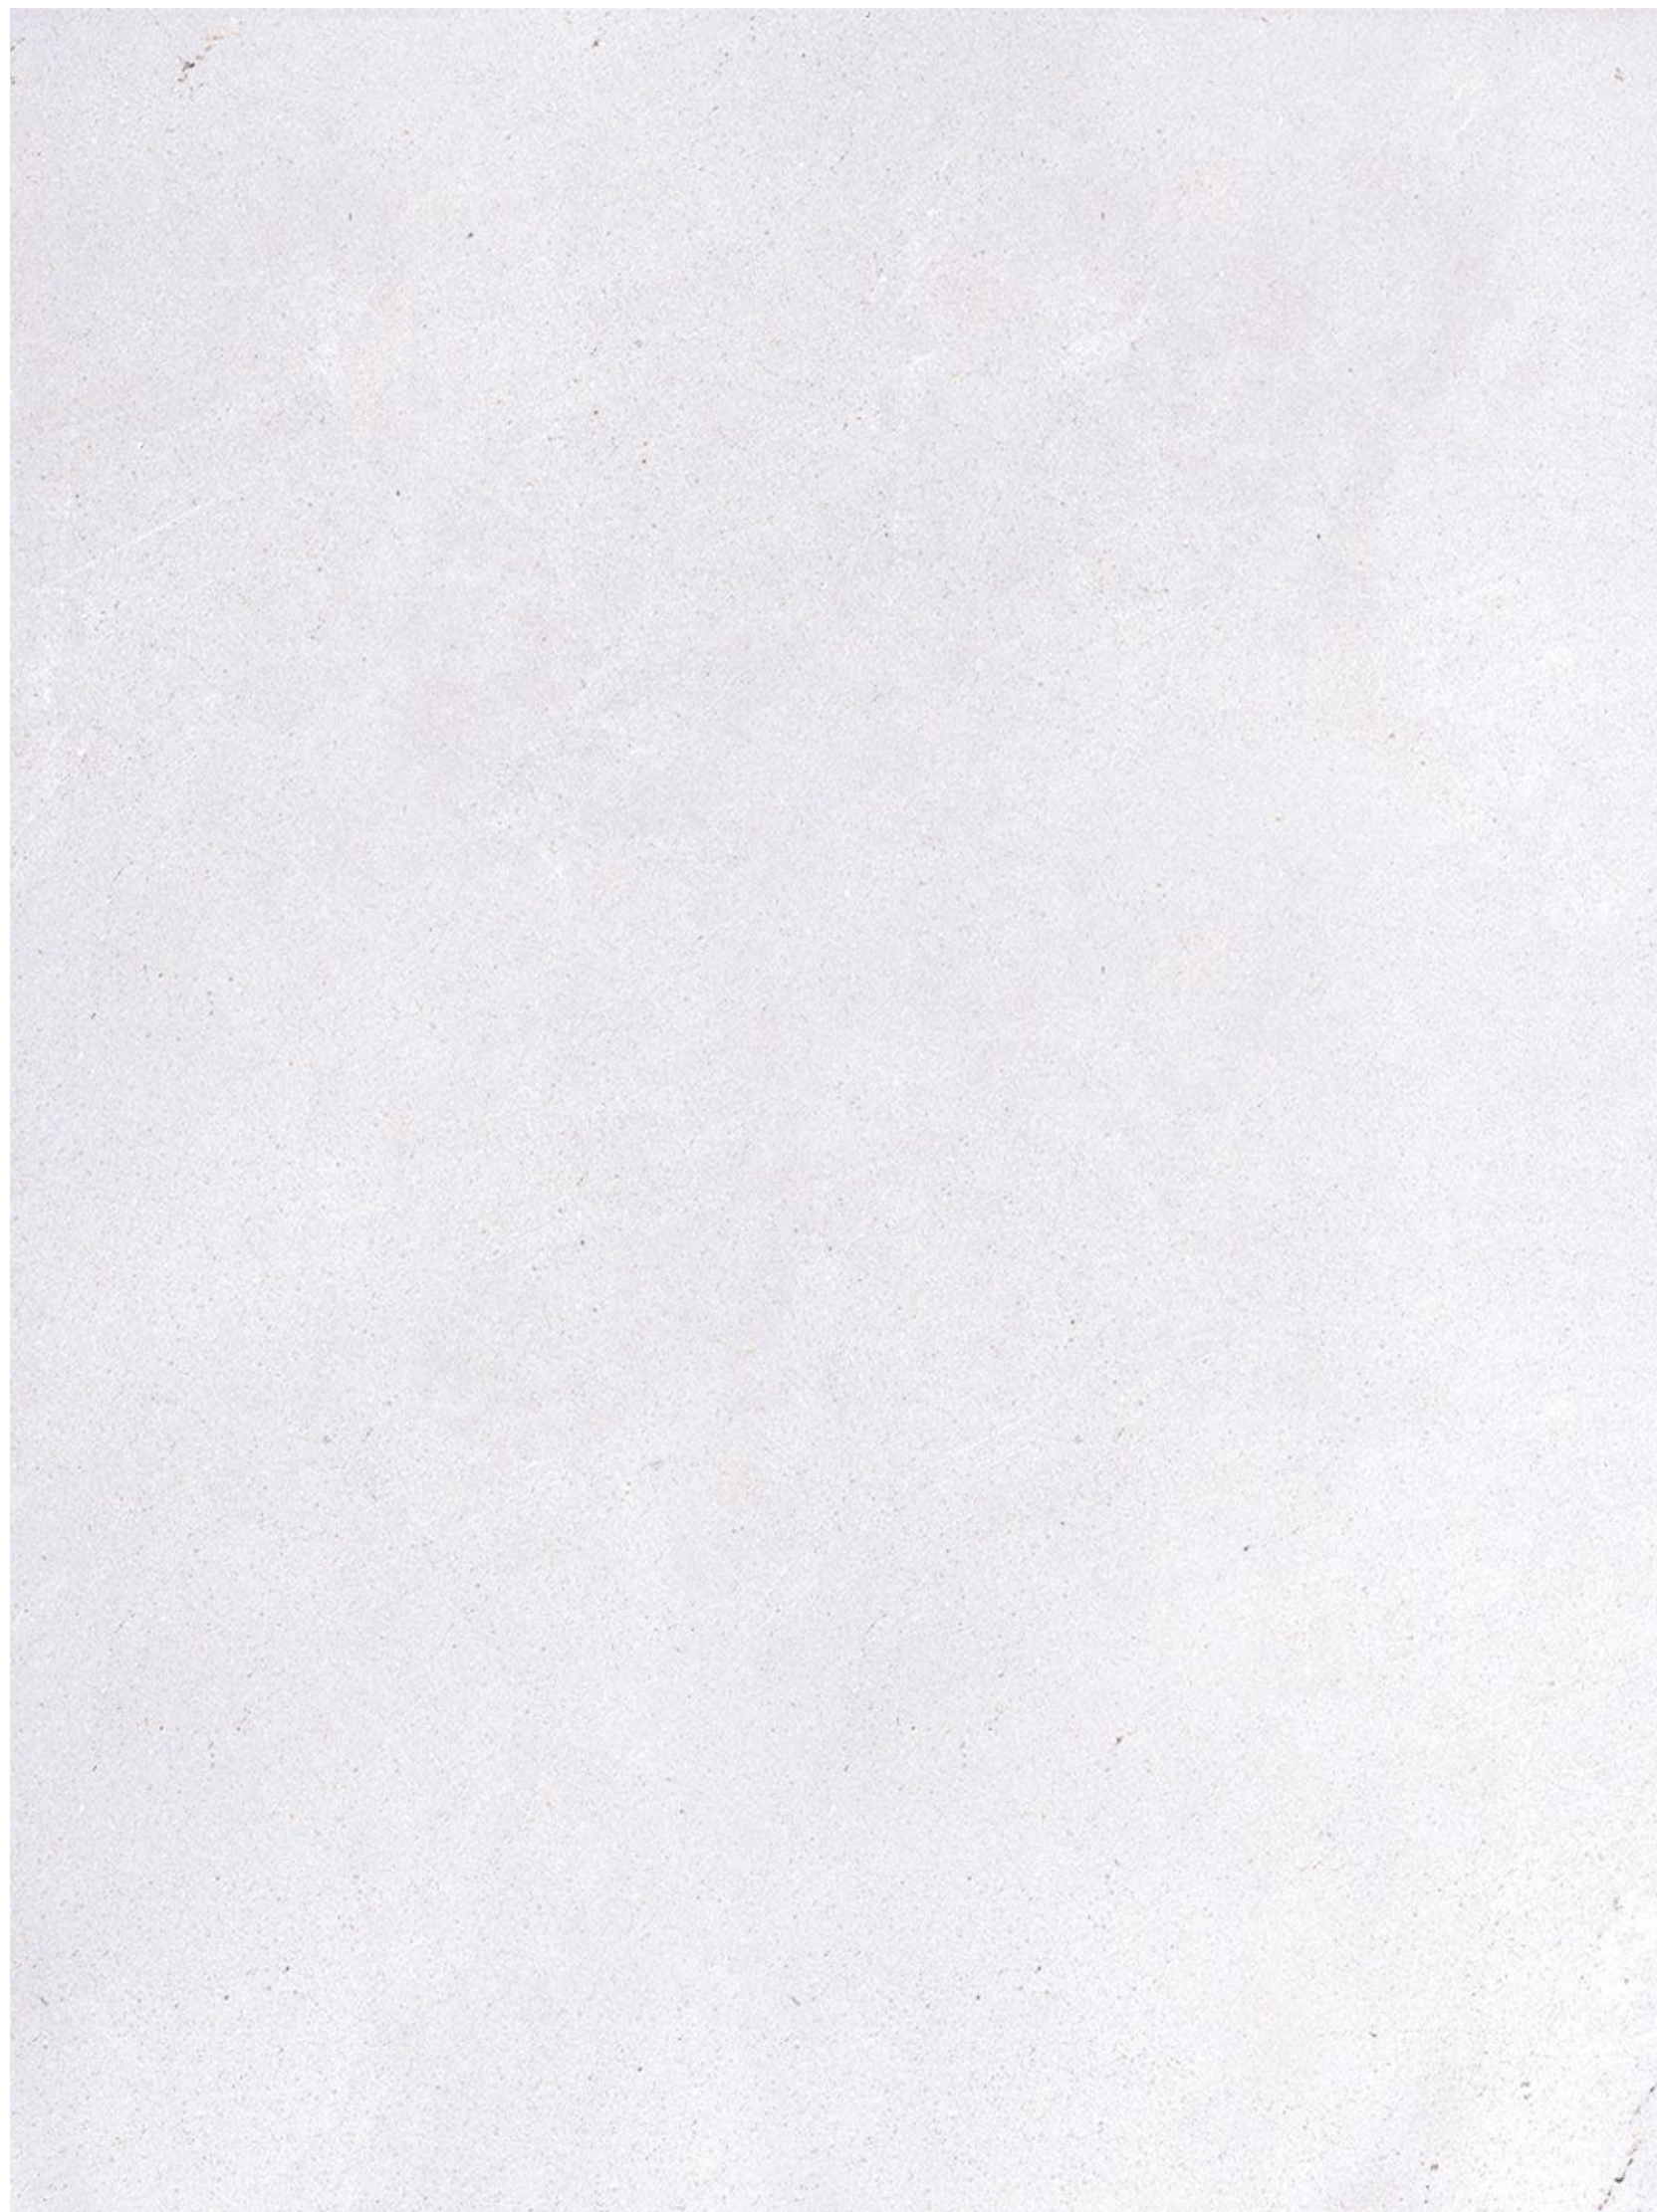

60x60cm - 9 FACES



SILVER



60x60cm - 9 FACES



GREY



60x60cm - 9 FACES



ANTRACITA



60x60cm - 9 FACES




TECHNICAL FEATURE DATA (A-06)

TECHNICAL DATA		NORMAL STANDARDS	PROVISIONS OF STANDARD	TEST RESULT		CONCLUSION	
				MATT	LAPPATO		
Length and width		EN ISO 10545-2	Deviation in percent, of average size from the work size:±0.6%	+0.04% ~ 0.08%	+0.04% ~ 0.08%	PASS	
Thickness			Deviation in percent, of average size from the work size thickness:±5%	-1.82% ~ 0.86%	-1.82% ~ 0.86%	PASS	
Straightness of sides			Maximum deviation from straightness, in percent, related to corresponding work size:±0.5%	-0.04% ~ +0.05%	-0.04% ~ +0.05%	PASS	
Rectangularity			Maximum deviation from rectangularity, in percent, related to corresponding work size:±0.6%	-0.05% ~ +0.07%	-0.05% ~ +0.07%	PASS	
Surface Flatness	Centre Curvature		Centre curvature, related to diagonal calculated from work size: ±0.5%	-0.04% ~ +0.07%	-0.04% ~ +0.07%	PASS	
	Edge Curvature		Edge curvature, related to corresponding work sizes: ±0.5%	-0.05% ~ +0.07%	-0.05% ~ +0.07%	PASS	
	Warpage		Warpage, related to diagonal calculated from the work size:±0.5%	-0.04% ~ 0.04%	-0.04% ~ 0.04%	PASS	
Water Absortion			EN ISO 10545-3	Average:≤0.5%, Individual:≤0.6%	Average:≤0.5%, Individual:≤0.6%	Average:≤0.5%, Individual:≤0.6%	PASS
Breaking Strength			EN ISO 10545-4	Thickness≥7.5mm, results>1300N	1832N	1832N	PASS
Modulus of rupture				≥35MPa, Individual ≥32MPa	Average: ≥36MPa	Average: ≥36MPa	PASS
Resistance to deep abrasion		EN ISO 10545-7	Report abrasion class and cycles passed	Class 5	Class 5	PASS	
Crazing Resistance		EN ISO 10545-11	Required	Fully resistant	Fully resistant	PASS	
Frost Resistance		EN ISO 10545-12		Fully resistant	Fully resistant	PASS	
Slip Resistance Ratinge (Ramp Test)		DIN 51130	Manufactuere to state value and test method used	R9	-	PASS	
Slip Resistance Ratinge (Pendulum Test)		BS 7976-2		-	-	-	
Resistance to chemicals	Resistance to low concentraions of acids an alkalis	EN ISO 1054-13	Manufacturer to State Classification	GLA	GLA	PASS	
	Resistance to household chemicals and swimming pool salts		Minimum GB	GA	GA	PASS	
Resistance to stains		EN ISO 1054-14	Minimum Class 3	Class 5	Class 5	PASS	



◇ BASALT Grey



CAYENNE
CERAMICHE

Calle La Cosa, 18, 12200,
Onda (Castellón), Spain

Tel: +34 964 603 425
Fax: +34 964 602 688

www.finzzi.com

office@finzzi.com